



型番：MEB4101/25N5-N8 器具全光束 2400lm

光源：DLU42505/N-N8

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	7	8	7
-80°	70	38	62
-70°	112	92	116
-60°	171	145	157
-50°	208	194	202
-40°	246	238	241
-30°	278	273	275
-20°	300	300	300
-10°	315	316	314
0°	320	320	320
10°	315	316	314
20°	300	300	300
30°	278	273	275
40°	246	238	241
50°	208	194	202
60°	171	145	157
70°	112	92	116
80°	70	38	62
90°	7	8	7

配光曲線図

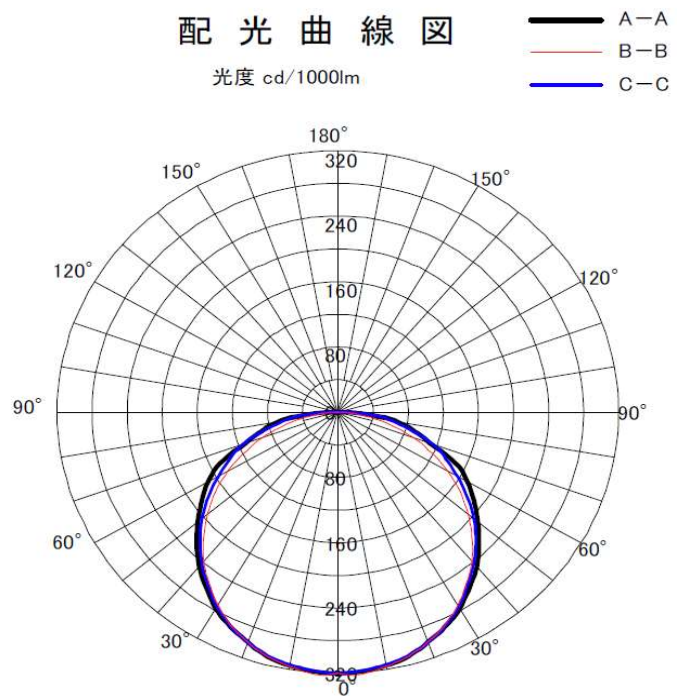

器具効率		最大取付間隔		保守率		
UP 0.2 %	100.1 %	A-A 1.28 H	良	中	否	
DN 99.9 %		B-B 1.26 H	83	81	78	

反射率 (%)	天井	80						70						50						30						0												
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	30	10	30	10	0										
	床	30						10						30						10						30						10						0
室指数	照明率 U (× 0.01)																																					
0.6	46	37	30	44	36	30	45	36	30	43	35	30	43	36	30	42	35	30	35	30	35	30	35	30	35	30	28											
0.8	57	48	41	54	46	40	56	47	41	53	45	40	54	46	40	52	45	39	45	40	45	39	45	40	45	39	37											
1.0	66	57	49	62	54	48	65	56	49	61	53	47	62	54	48	59	52	47	53	47	53	47	52	47	52	47	44											
1.25	75	66	58	69	61	56	74	65	58	68	61	55	70	63	57	66	60	55	61	55	60	55	60	55	60	55	52											
1.5	82	72	65	74	67	62	80	71	64	73	67	61	76	69	63	71	65	61	67	61	65	61	65	61	65	61	58											
2.0	92	83	76	82	76	71	89	81	75	81	75	70	85	78	73	79	74	70	75	71	74	70	74	70	74	70	66											
2.5	98	91	84	87	82	77	96	89	83	86	81	77	90	85	80	84	79	76	81	77	79	76	79	76	79	76	72											
3.0	104	97	91	91	86	82	101	94	89	90	85	82	95	90	86	87	84	80	86	82	84	80	86	82	84	80	77											
4.0	110	105	100	96	92	89	107	102	97	94	91	88	101	97	93	92	89	87	92	89	89	87	92	89	89	87	83											
5.0	115	110	105	98	95	93	111	107	103	97	95	92	104	101	98	95	93	91	96	93	93	91	96	93	93	91	86											