



	光度(cd/1000lm)		
	A-A	B-B	C-C
0	481	479	479
10	469	467	468
20	434	430	433
30	372	368	370
40	290	285	290
50	201	195	200
60	118	115	119
70	47	45	44
80	3	3	4
90	0	0	1
100	0	0	0
110	0	0	1
120	0	0	0
130	1	0	1
140	1	1	1
150	1	1	1
160	2	2	2
170	2	2	2
180	1	2	2



光源	LDF5N-H-GX53	
定格光束(器具全光束)	360	
器具効率	100.0	%
下方効率	99.6	%
上方効率	0.4	%

最大取付間隔		
A断面	1.16	H
B断面	1.15	H

保守率		
良	0.83	%
中	0.81	%
否	0.77	%

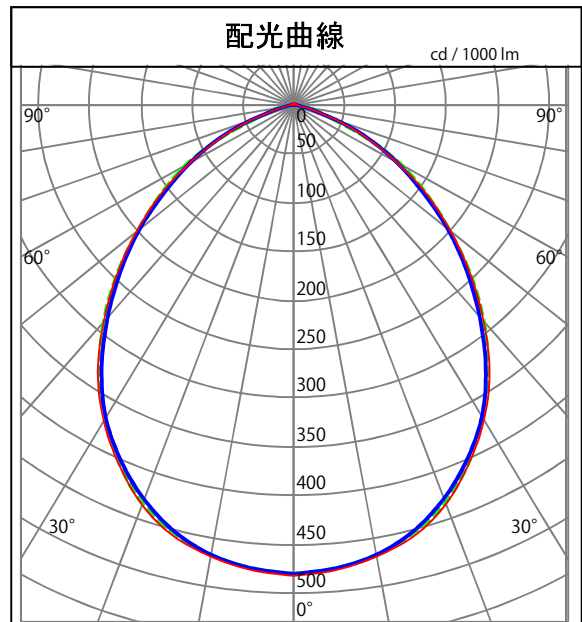

反射率 (%)	天井	80								70								50						30			0
	壁	70	50	30	70	50	30	10	70	50	30	70	50	30	10	50	30	50	30	10	30	30	10	0			
床		30		10					30		10				30		10		30		10		0				
室指数	照明率U (× 0.01)																										
0.40	50	37	30	47	36	29	25	49	37	30	46	35	29	25	36	29	35	29	25	29	29	25	23				
0.60	69	56	48	64	53	46	41	67	55	47	62	52	46	41	53	46	51	45	41	46	45	41	39				
0.80	79	66	57	72	62	55	50	77	65	56	70	61	54	49	62	55	60	54	49	54	53	49	47				
1.00	88	75	66	79	70	63	58	85	74	66	78	69	63	58	71	64	67	62	57	63	61	57	55				
1.25	96	85	76	86	78	72	67	93	83	75	84	77	71	67	80	73	75	70	66	71	69	66	64				
1.50	101	90	82	89	82	76	71	98	88	81	87	81	75	71	84	78	79	74	70	76	73	70	68				
2.00	108	99	91	94	88	83	79	105	96	89	93	87	83	79	92	86	85	81	78	83	80	77	75				
2.50	113	105	98	97	93	88	85	109	102	96	96	92	88	84	97	92	90	86	83	88	85	82	80				
3.00	116	109	103	99	95	91	88	112	106	100	98	94	91	88	100	96	92	89	87	92	88	85	83				
4.00	120	114	109	102	98	96	93	115	110	106	100	97	95	92	104	101	95	93	91	96	91	89	87				
5.00	122	117	113	103	101	98	96	118	113	110	102	99	97	95	107	104	97	95	94	99	94	92	90				
7.00	125	121	118	105	103	101	99	120	117	114	104	102	100	99	110	108	100	98	97	102	96	95	92				
10.00	127	124	122	106	105	103	102	122	120	118	105	104	102	101	112	110	101	100	99	104	98	97	95				