
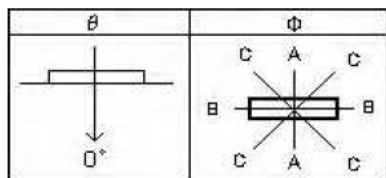


品名 : SXW-LE171710N
 定格光束 : 520lm 消費電力 : 6.0W
 備考 : LDA6N-G-E17/S ランプ使用時

配光曲線図

— A-A
 — B-B
 — C-C

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	96	96	96	0°	96	96	96
-170°	104	97	99	10°	104	105	106
-160°	114	98	106	20°	116	119	120
-150°	125	100	110	30°	127	122	127
-140°	106	98	114	40°	106	99	99
-130°	70	89	95	50°	71	63	66
-120°	57	63	62	60°	60	63	65
-110°	57	25	43	70°	60	68	69
-100°	53	14	30	80°	57	64	69
-90°	51	10	27	90°	55	63	67
-80°	53	14	30	100°	57	64	69
-70°	57	25	43	110°	60	68	69
-60°	57	63	62	120°	60	63	65
-50°	70	89	95	130°	71	63	66
-40°	106	98	114	140°	106	99	99
-30°	125	100	110	150°	127	122	127
-20°	114	98	106	160°	116	119	120
-10°	104	97	99	170°	104	105	106
0°	96	96	96	180°	96	96	96

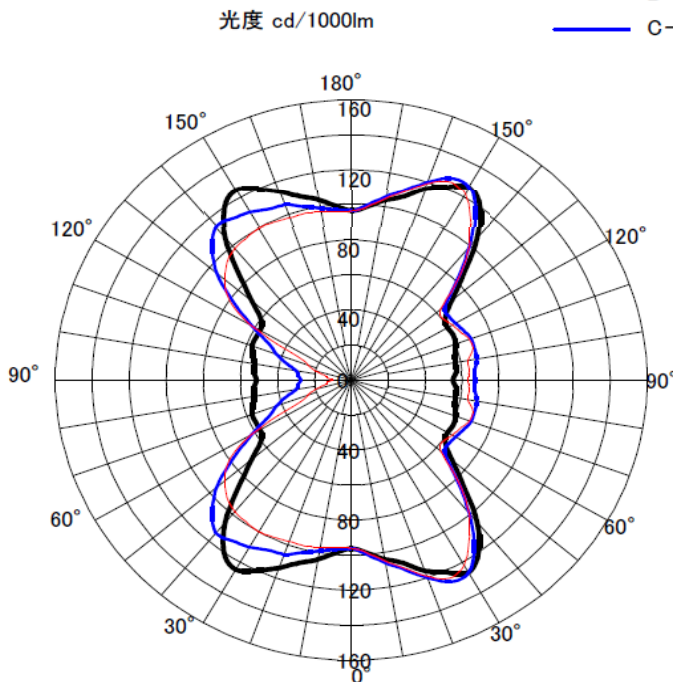

器具効率		最大取付間隔	保守率		
UP 50.0%	100.0 %	A-A 1.67 H	良	中	否
DN 50.0%		B-B 1.61 H	67	63	56

反射率 (%)	天井	80						70						50						30						0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0			
床	30	10						30						10						30						10	0
室指数	照明率 U (× 0.01)																										
0.6	38	29	23	36	28	23	35	27	22	33	26	21	29	23	19	28	23	19	19	16	23	19	11				
0.8	47	38	31	44	36	30	43	35	29	41	34	29	37	30	25	35	29	25	25	21	29	25	14				
1.0	55	45	38	51	43	37	50	42	35	47	40	34	42	35	30	40	34	30	29	25	34	30	17				
1.25	62	52	45	57	49	43	57	48	42	53	46	40	47	41	36	45	39	35	34	30	39	35	20				
1.5	67	58	50	61	54	48	62	53	47	57	50	45	51	45	40	48	43	38	37	33	43	38	22				
2.0	76	67	59	68	61	55	69	61	55	63	57	51	57	51	46	53	48	44	42	38	48	44	26				
2.5	82	73	66	72	66	60	74	67	61	67	61	56	61	56	51	57	52	48	46	42	52	48	29				
3.0	86	78	71	75	70	65	79	72	66	70	65	60	65	60	55	59	55	52	49	45	55	52	31				
4.0	92	85	79	80	75	70	84	78	73	74	70	66	69	64	61	63	60	56	52	50	60	56	34				
5.0	96	90	84	82	78	74	87	82	77	76	73	69	72	68	64	65	62	59	55	52	62	59	36				