



	光度(cd/1000lm)		
	A-A	B-B	C-C
0	422	422	421
10	415	414	413
20	388	388	388
30	338	339	338
40	272	273	272
50	197	197	198
60	128	128	127
70	68	67	67
80	22	22	22
90	2	2	2
100	1	1	1
110	1	1	1
120	1	2	1
130	1	1	1
140	1	2	1
150	2	2	2
160	2	2	2
170	3	3	3
180	2	2	2



光源	LDF5N-H-GX53	
定格光束(器具全光束)	420	
器具効率	100.0	%
下方効率	99.1	%
上方効率	0.9	%

最大取付間隔		
A断面	1.19	H
B断面	1.20	H

保守率		
良	0.83	%
中	0.81	%
否	0.77	%

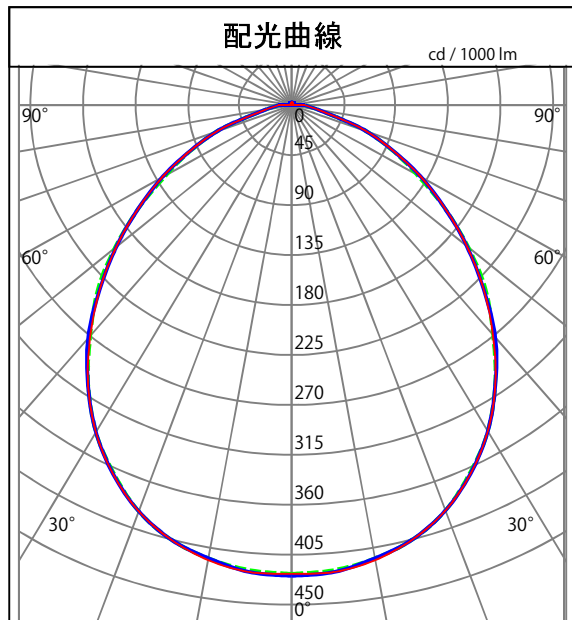

反射率 (%)	天井	80								70								50						30				0
	壁	70	50	30	70	50	30	10	70	50	30	10	70	50	30	10	50	30	50	30	10	30	30	10	0			
		床	30		10				30		10				30		10		30		10		30		10		0	
室指数	照明率U (× 0.01)																											
0.40	48	35	28	45	34	27	23	47	35	28	44	33	27	23	34	27	33	27	23	27	26	23	21					
0.60	66	53	44	61	50	43	38	65	52	44	60	49	43	38	50	43	48	42	38	42	42	37	36					
0.80	77	62	53	70	59	51	46	74	61	53	68	58	51	46	59	52	56	50	45	51	49	45	43					
1.00	85	72	63	77	67	60	54	83	70	62	75	66	59	54	68	60	64	58	53	59	57	53	51					
1.25	94	81	72	83	74	68	63	91	79	71	82	74	67	63	76	69	72	66	62	67	65	61	59					
1.50	98	87	78	87	79	73	68	95	85	77	85	78	72	67	81	74	76	71	66	72	70	66	63					
2.00	106	96	88	92	85	80	75	102	93	86	90	84	79	75	89	83	82	78	74	80	77	73	71					
2.50	111	102	95	96	90	86	81	107	99	93	94	89	85	81	94	89	87	83	80	85	82	79	76					
3.00	114	106	100	98	93	89	85	110	103	97	96	92	88	85	97	93	90	86	83	89	85	82	80					
4.00	118	112	106	100	97	93	90	114	108	103	99	96	92	90	102	98	93	91	88	93	89	87	84					
5.00	121	115	111	102	99	96	94	116	112	107	101	98	95	93	105	102	96	93	91	96	91	90	87					
7.00	124	120	116	104	102	100	98	119	116	112	103	101	99	97	108	106	98	97	95	100	95	93	90					
10.00	126	123	120	105	104	102	101	121	119	116	104	103	101	100	111	109	100	99	98	103	97	96	93					