



	光度(cd/1000lm)		
	A-A	B-B	C-C
0	429	429	429
10	422	421	422
20	394	394	394
30	343	343	343
40	274	274	275
50	196	197	198
60	127	127	126
70	67	65	66
80	21	21	21
90	2	1	1
100	0	0	0
110	0	1	1
120	0	0	0
130	1	1	0
140	1	1	0
150	1	1	1
160	2	2	1
170	2	2	2
180	1	1	1



光源	LDF5L-H-GX53	
定格光束(器具全光束)	400	
器具効率	100.0	%
下方効率	99.6	%
上方効率	0.4	%

最大取付間隔		
A断面	1.19	H
B断面	1.19	H

保守率		
良	0.83	%
中	0.81	%
否	0.77	%

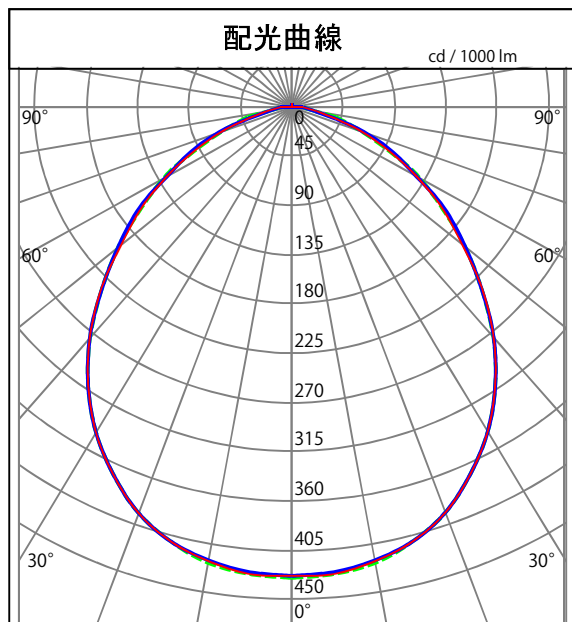

反射率 (%)	天井	80								70								50					30			0
	壁	70	50	30	70	50	30	10	70	50	30	70	50	30	10	50	30	50	30	10	30	30	10	0		
	床	30		10			30			10		30		10		30		10		30		10		0		
室指数	照明率U (× 0.01)																									
0.40	48	35	28	45	34	27	23	47	35	28	45	34	27	23	34	27	33	27	23	27	27	23	21			
0.60	67	53	45	62	50	43	38	65	52	44	60	50	43	38	51	44	49	43	38	43	42	38	36			
0.80	77	63	54	70	59	52	46	75	62	53	68	58	51	46	60	52	57	51	46	51	50	46	44			
1.00	86	72	63	77	67	60	55	83	71	62	75	66	59	54	68	61	65	59	54	59	58	54	52			
1.25	94	82	73	83	75	68	63	91	80	72	82	74	68	63	77	70	72	67	62	68	66	62	60			
1.50	99	87	78	87	79	73	68	96	85	77	85	78	72	68	81	75	76	71	67	72	70	66	64			
2.00	106	96	88	92	86	80	76	103	93	86	91	85	80	75	89	83	83	78	75	80	77	74	71			
2.50	111	102	95	96	90	86	82	107	100	93	94	89	85	81	94	89	87	84	80	86	82	79	77			
3.00	114	106	100	98	93	89	85	110	103	97	96	92	88	85	98	93	90	87	84	89	85	83	80			
4.00	118	112	106	101	97	94	91	114	109	104	99	96	93	90	102	98	94	91	88	94	89	87	85			
5.00	121	116	111	102	99	97	94	117	112	108	101	98	96	93	105	102	96	94	92	97	92	90	87			
7.00	124	120	116	104	102	100	98	119	116	113	103	101	99	97	109	106	98	97	95	100	95	94	91			
10.00	126	123	120	106	104	102	101	121	119	116	104	103	101	100	111	109	100	99	98	103	97	96	93			